




CE-SP4T70


4K@60Hz HDMI Splitter
+ Extender




Lightning Protection
Surge Protection
ESD Protection




HDMI Loop-Out




Zero Latency



1 IN 4 OUT



70 M




PoC




Stable
Performance



Visually Lossless



RS232 Control




Bi-directional
IR Passback



Audio
De- Embedder

Connection Diagram

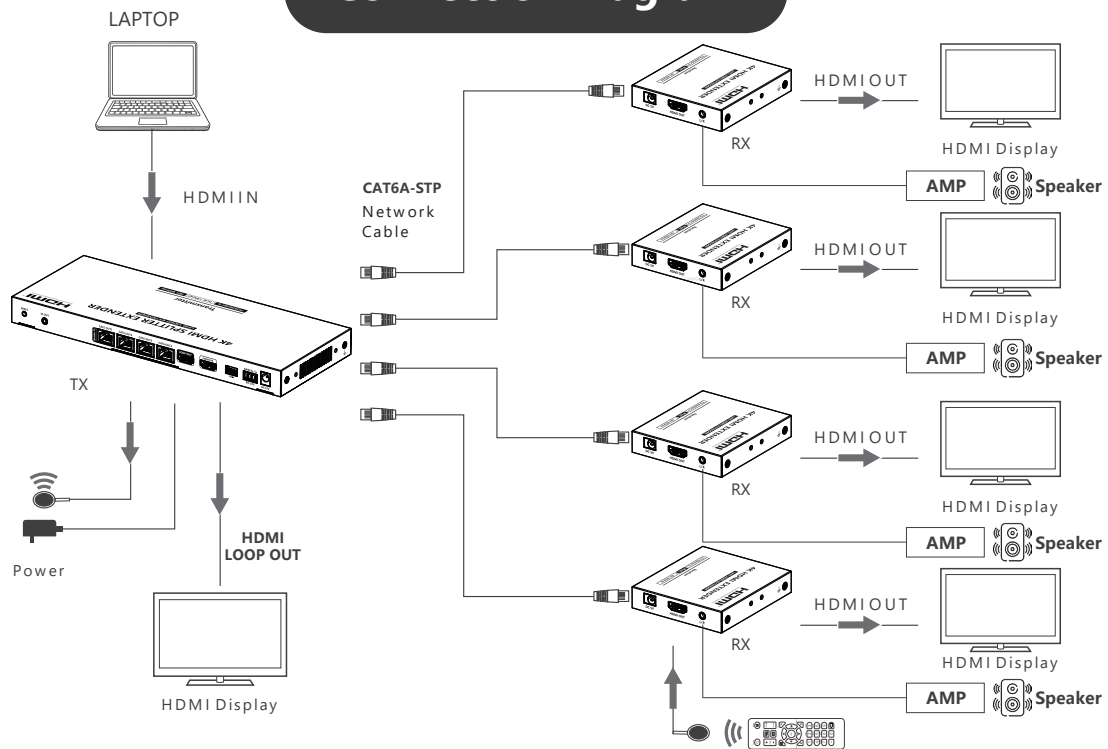

Precision in Every Frame – Stunning 4K @ 60Hz HDR Performance

- ▶ Perfectly suited for high-speed visuals, real-time content, and professional-grade AV — all with zero lag, zero compromise
- ▶ Experience the brilliance of full 4K at 60Hz, delivering ultra-smooth motion, rich color depth, and crisp detail — even over long distances with UNiQ HDMI 4K60Hz extenders




Stable, Real-Time Signal Transmission up to 70 Meters


- ▶ Supports zero-delay video and audio transmission over CAT6/6a/7 cables
- ▶ Maintains consistent quality across distances up to 70 meters
- ▶ Ensures real-time synchronization—perfect for surveillance and live streaming
- ▶ Designed for use in multi-screen or time-sensitive AV environments

EDID and RS-232 Control for Enhanced Functionality


- ▶ The EDID control feature allows users to set and maintain the correct display resolution between devices
- ▶ RS-232 control enables upper computer systems to remotely manage and configure the device
- ▶ These control interfaces ensure stable and accurate communication for reliable AV performance
- ▶ Ideal for professional environments, the setup simplifies integration into complex AV systems

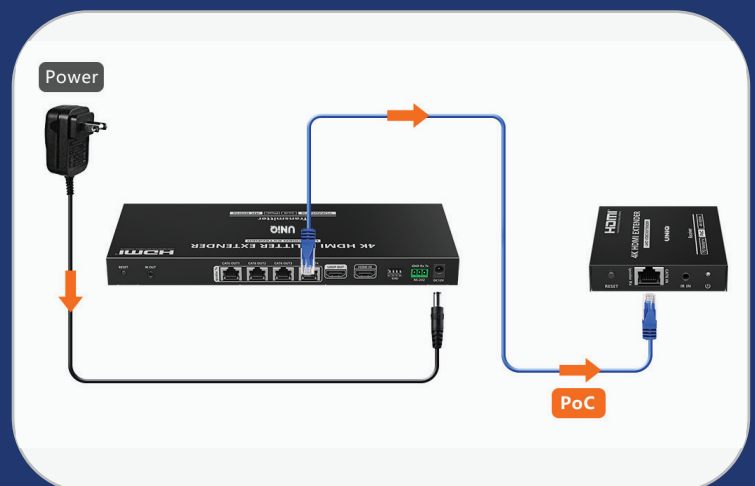


1 IN 8 OUT

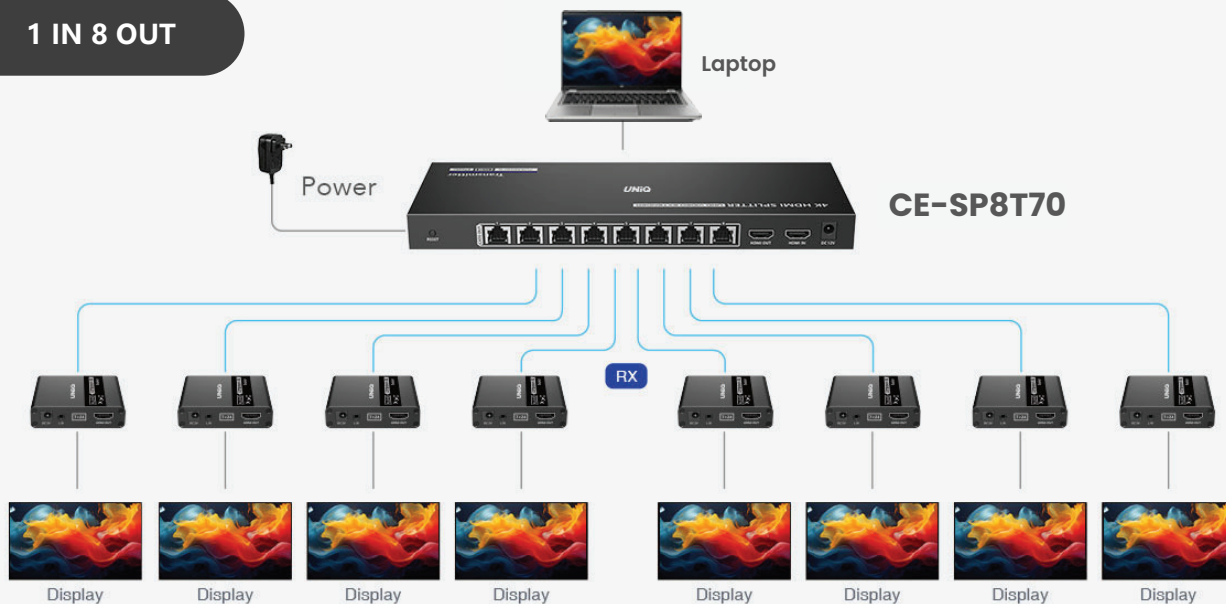

1 IN 4 OUT

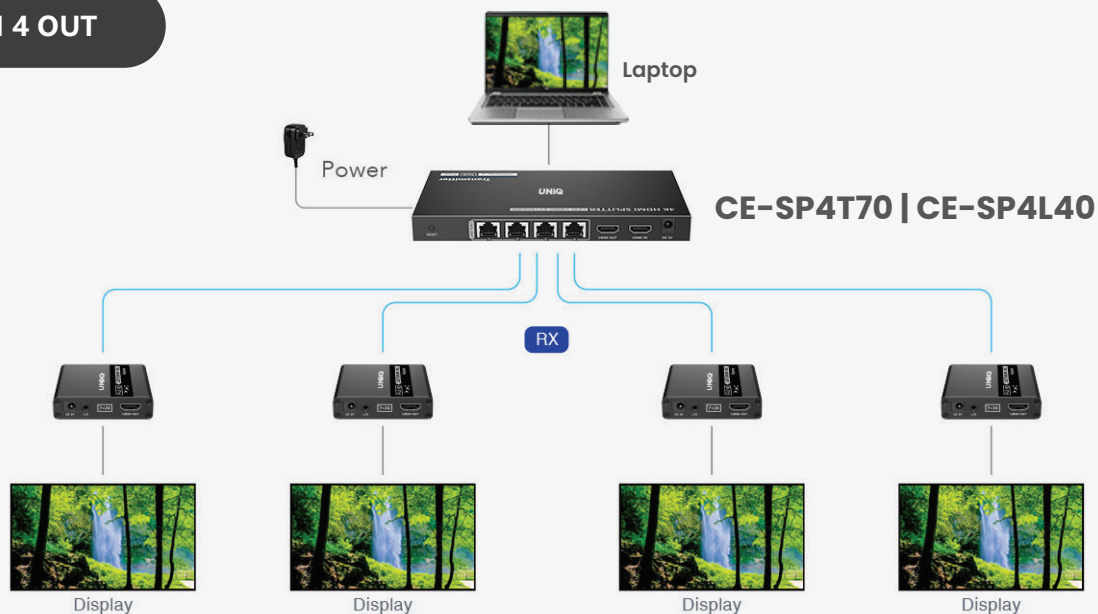


1 IN 2 OUT

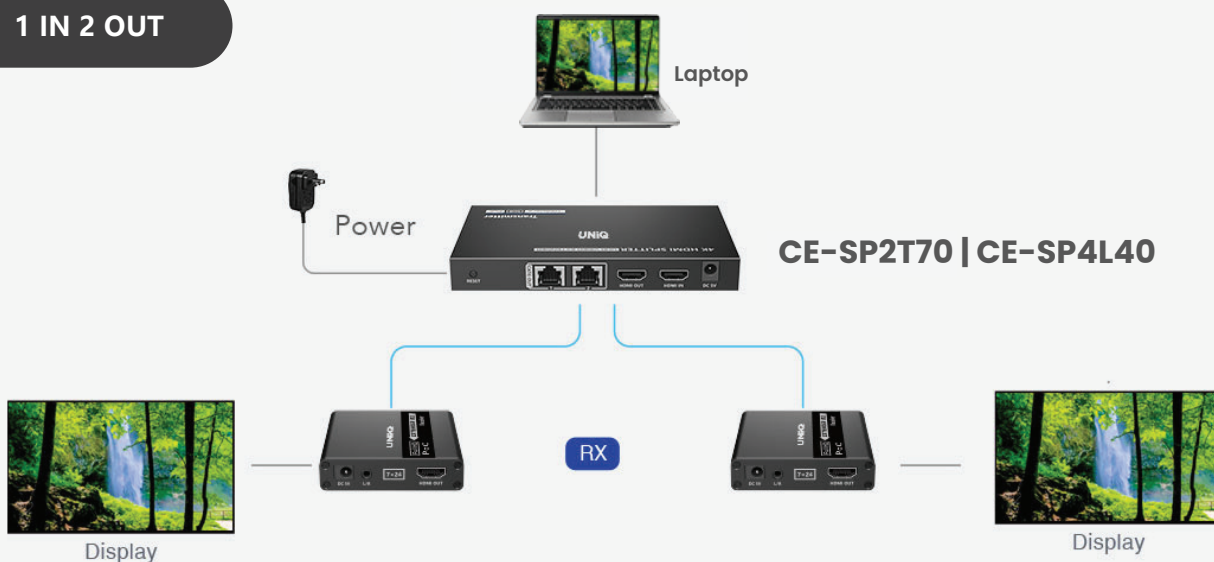


Product Specifications **CE-SP4T70**

Item	Specification
Transport protocol	ipcolor
Distribution mode	1 IN 4 OUT
Transmission Distance	CAT6/6A/7≤70m
HDMI signal	HDMI 2.0, HDCP 2.2
Audio formats	4K: LPCM/DTS/Dolby Digital 5.1; 1080P: LPCM/DTS/Dolby Digital 5.1/Dolby Digital plus7.1
IR	Support IR passback function (20KHz~60KHz)
RS-232	3 pin: TxD-RxD-GND, follows RS-232 levels
Working Temperature	-20~60 °C
Storage Temperature	-30~70 °C
Humidity (no condensation)	-0~90% RH
Resolution	480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz, 1280x960,1280x800, 1280x1024, 1680x1050, 1600x1200, 1600x900, 1024x768, 800x600, 1920x1200, 3840x2160@24/25/30/50/60Hz, 4096x2160@24/25/30Hz
Power supply	TX: DC12V/2A
Power consumption	TX+RX < 11W
Protection	ESD protection 1a Contact discharge level 2 1b Air discharge level 3 Implementation of the standard: IEC61000-4-2
	Lightning protection
	Surge protection
Material	Iron
Color	Black
Weight	TX: 672g RX: 145g
Dimension	TX: 265.0(L) x 104.0(W) x 23.0(H)mm RX: 85.0(L) x 75.5(W) x 16.5(H)mm
Package Contents	1) HDMI Splitter Extender TX x1 2) HDMI Splitter Extender RX x 4 3) Power Adaptor DC12V/2A x 1 4) IR Blaster extension Cable x 1 5) IR Receiver extension Cable x 4 6) RS-232 Terminal Block x1 7) Mounting Brackets(TX) x 2 8) Mounting Brackets(RX) x 8 9) Screw x 24 10) Grounding Screw x 6 11) User Manual x1

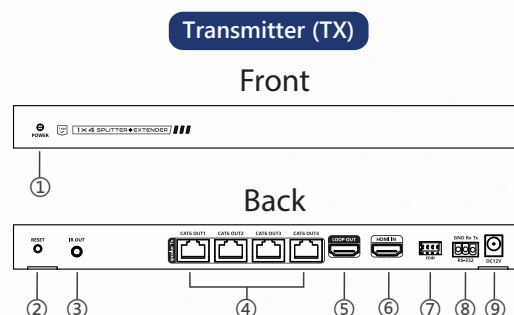

- 01 Power/Signal
- 02 Reset button
- 03 IR out
- 04 RJ45 output port
- 05 HDMI output port
- 06 HDMI input port
- 07 EDID DIP switch
- 08 RS-232 Port
- 09 Power

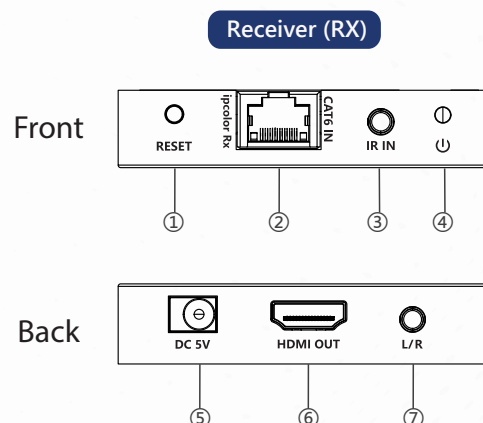

- 01 Reset button
- 02 RJ45 input
- 03 IR in
- 04 Power/Signal indicator
- 05 DC5V
- 06 HDMI output
- 07 3.5mm stereo output


Applications



Auditorium



NOC / SOC / CCC



Conference-Room



Town Hall



Training Hall

Prestigious Lineup of Cutting-Edge Professional AV Products

Ai Interactive Displays

AiO | Pro | Education Series
65" | 75" | 86" | 98" | 100"



Active LED Video Wall

Indoor & Outdoor LED Walls
CoB, GOB, and
Custom Pixel Pitch Options




Video Conferencing Products & Professional Cameras

From AI Video Bars to PTZ Cameras
AiO Video Bars | AiO PTZ Video Bars
PTZ Cameras | Speakers Phone
Conferencing | Microphones | DSP



AV Interface Products

Extenders – CAT6 Wireless | Point-Point
KVM Extenders | Over-IP
Matrix & Splitter Cum Extenders
Splitters Switchers | Matrix

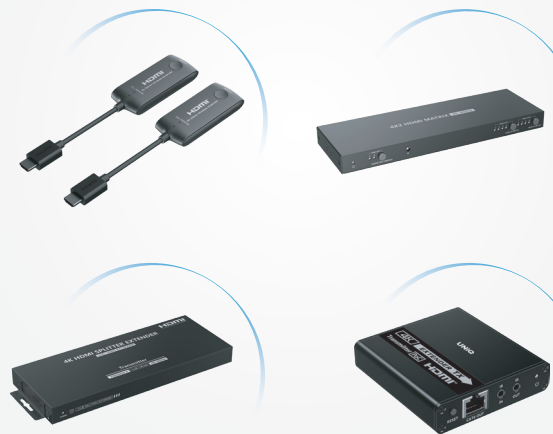

Disclaimer

- Specifications, features, visuals, and models are subject to change without notice.
- Product availability and features may vary by region.
- Colours/images shown are for reference only; actual product may differ.
- Warranty terms vary by model and region—refer to official documentation.
- We recommend staying updated via our official channels for the latest info.
- Performance may improve with software/firmware updates.
- All trademarks belong to their respective owners.
- We are not liable for typographical or illustrative errors.
- Please dispose of products responsibly as per local e-waste norms.
- Data (if applicable) is handled per our privacy and regulatory compliance.
- No liability is assumed for indirect or consequential damages